

Installation instructions

Fire detector base FIT-TR24V for FIT(H)-230(10) en FIT(H)-230RF(L)

Specifications:

Power supply:	Alternating current 220-240V 50/60Hz
DC trigger voltage:	DC 3-12V
Output power:	Direct Current DC 24V - 90mA - 2,4W




Product description:

- The FIT-TR24V base is compatible with the following AC smoke and heat detectors FIT(H)-230(10) FIT(H)-230RF(L)
- The base is powered by 220-240V.
- The base can be connected to the door closer with 24V operating voltage.
- The maximum interconnected number of smoke detectors is 40 pieces.

FITO Products by
Langkamp 12a
3961MS Wijk bij Duurstede
The Netherlands

Installation instruction diagram:

**Fig.1. Installation Instruction
(connect with 1 pcs smoke alarm)**

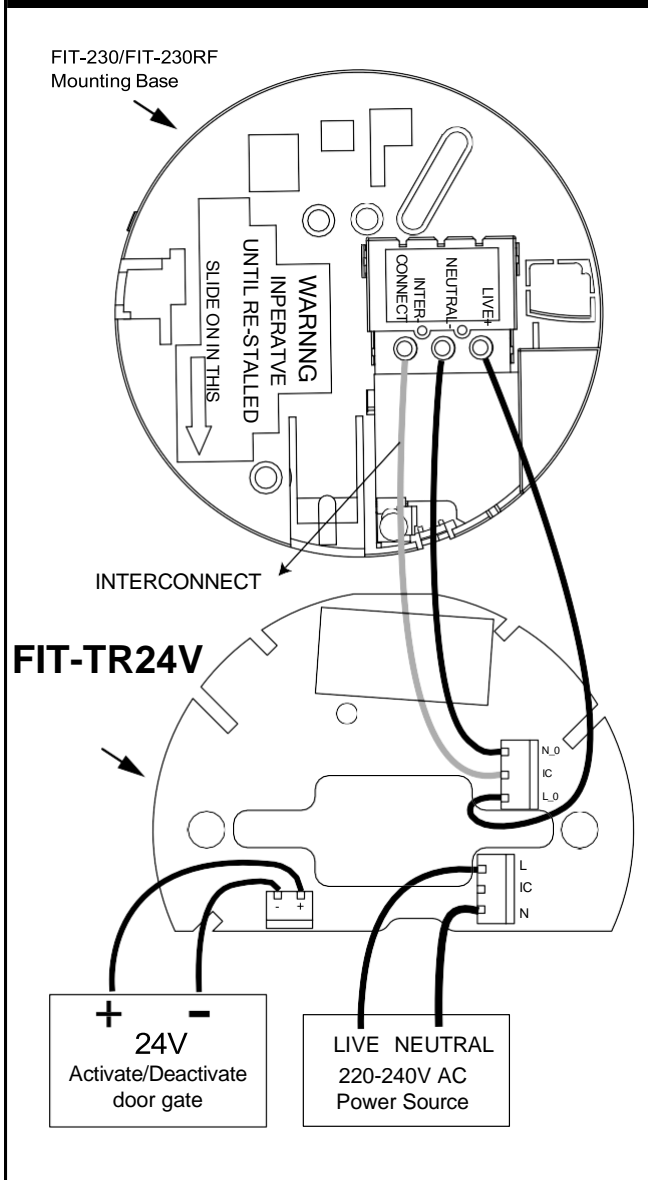

**Fig.2. Installation instruction
(more than 1 pcs smoke alarm)**

